


## V23050A1110A533 Product Details

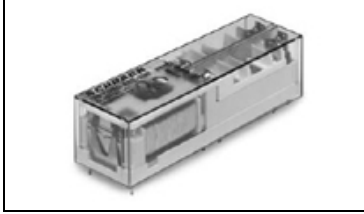

**V23050A1110A533**

### Relays with Forcibly Guided Contacts (Safety Relays)

#### Product Highlights:

- Relay Type = Safety Relay SR6
- V23050 Series
- DC Actuating System
- Contact Arrangement = 3 Form A & 3 Form B, 3PST-NO & 3PST-NC, 3 N/O & 3 N/C
- Contact Current Rating = 8 A

#### Product Type Features:

- Comment = Well suited for emergency shut-off, machine control, elevator and escalator control, light barrier control
- Termination Type = Through Hole

#### Electrical Characteristics:

- Actuating System = DC
- Contact Current Rating (A) = 8
- [Coil Resistance \( \$\Omega\$ \)](#) = 10000
- Coil Power, Nominal (mW) = 1.2
- Input Voltage (VDC) = 110

#### Body Related Features:

- [Series](#) = V23050
- Polarized = No

#### Contact Related Features:

- Relay Type = Safety Relay SR6
- Enclosure Type = Sealed
- Contact Type = Single button, forcibly guided
- Approx. Dimensions (L x W x H) (mm [in]) = 55.00 x 16.50 x 16.00 [2.167 x .650 x .630]
- Contact Base Material = Silver Tin Oxide
- Number of Bistable Coils = Single
- Bistable = No
- Mounting Options = PC Board

#### Configuration Related Features:

- [Contact Arrangement](#) = 3 Form A & 3 Form B, 3PST-NO & 3PST-NC, 3 N/O & 3 N/C
- Coil Magnetic System = Monostable

#### Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C
- RoHS/ELV Compliance History = Converted to comply with RoHS directive
- Approved Standards = UL Recognized, VDE Component Mark, TUV Approved, CSA Certified

#### Other:

- Brand = Schrack